



1394 Connector and Cable Testing



Presentation Goals

- ◆ Discuss critical parameters for a cable interconnect in P1394A systems
- ◆ Present a series of reasonable tests that system integrators can use to validate cable/connector interconnect assemblies




Critical areas for cable interconnect

- ◆ Differential impedance profile
- ◆ Skew
- ◆ Differential eye diagram
- ◆ Common mode impedance profile
- ◆ Common mode crosstalk
- ◆ Cable EMI shield effectiveness



Differential impedance profile

- ◆ Differential signals are the primary signaling mechanism
- ◆ Variations in differential impedance lead to signal loss and reflections
- ◆ TDR studies of differential impedance can detect bad cable terminations

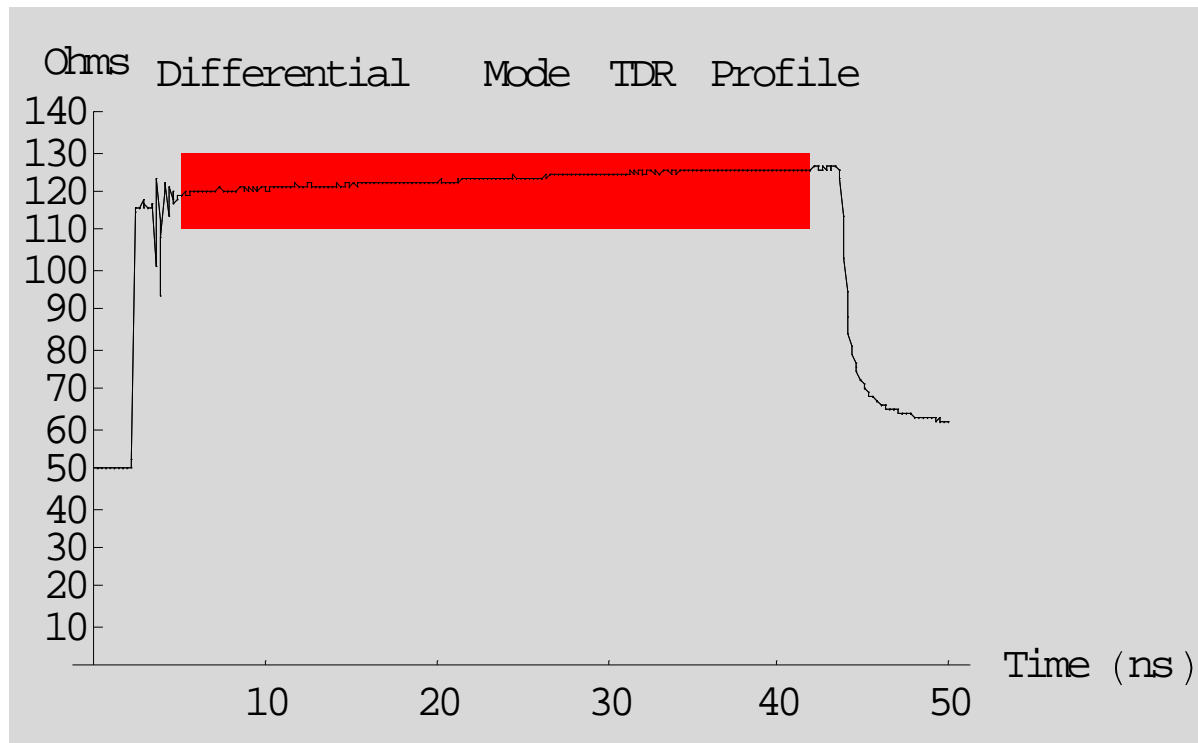




Skew

- ◆ Both differential pairs must be matched in terms of propagation delays
- ◆ Recommended procedure
 - TBD

Differential eye diagram


- ◆ The receiver end eye diagram is the fundamental measure of signal quality

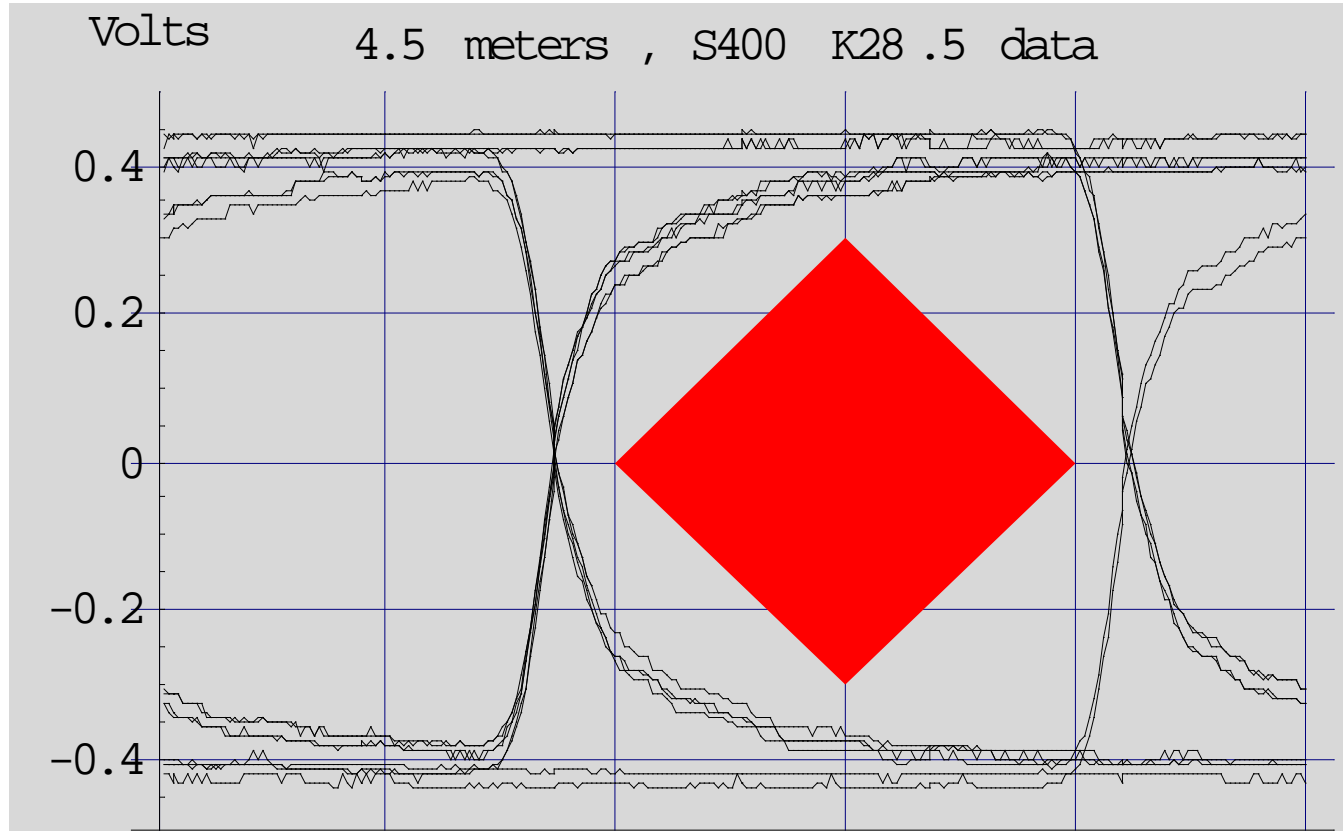



Common mode impedance profile



- ◆ Some signals, e.g., speed signaling, are common mode -- the common mode impedance profile must be sufficiently flat to avoid reflections and signal loss
- ◆ TDR studies of common mode impedance can detect crimped cables, etc.

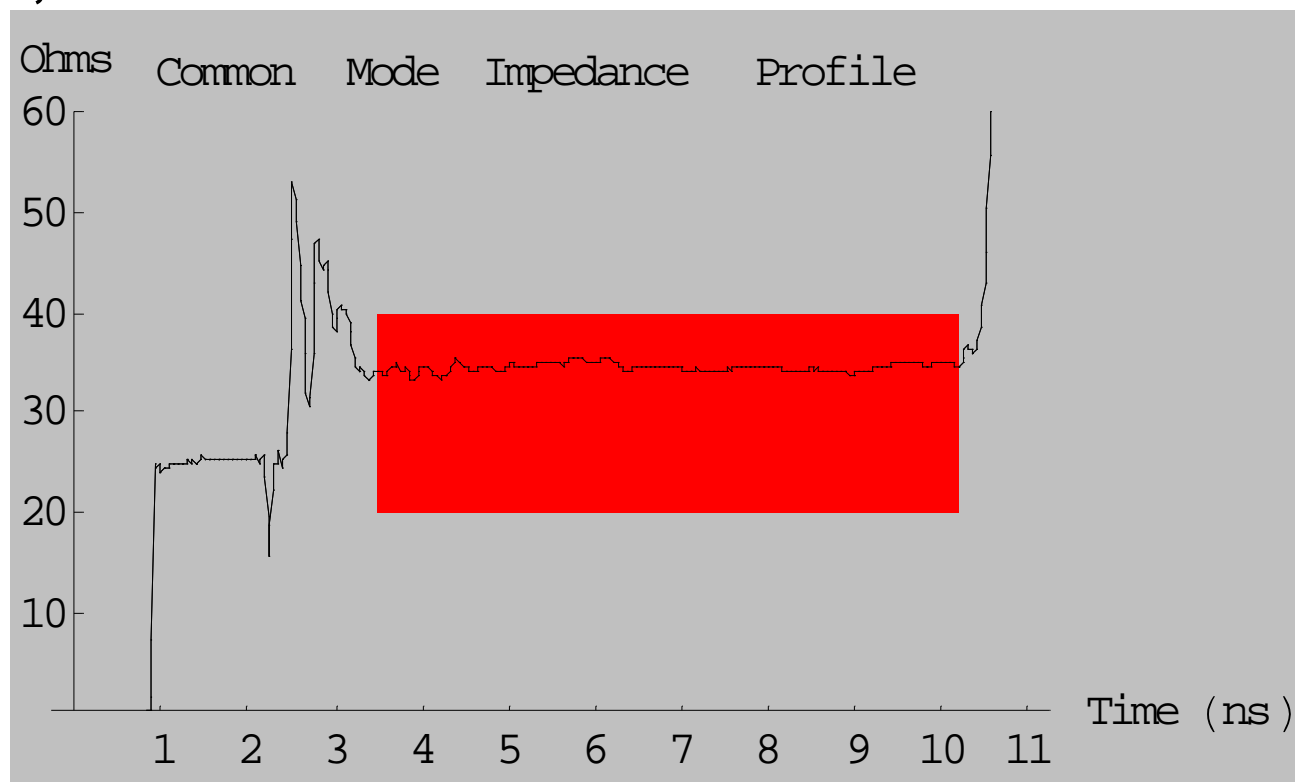



Common mode crosstalk


- ◆ Speed signaling at self-ID time can be corrupted by near-end cross talk

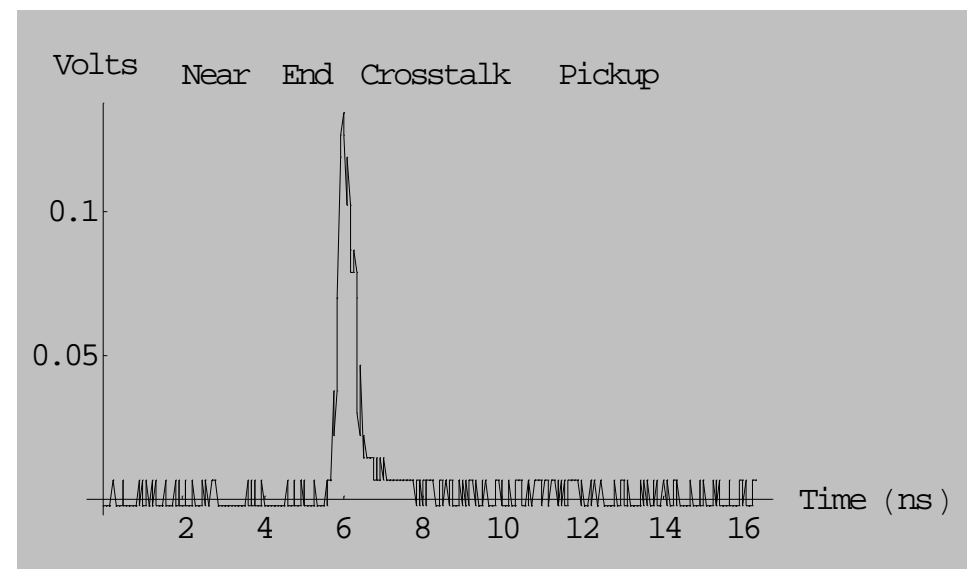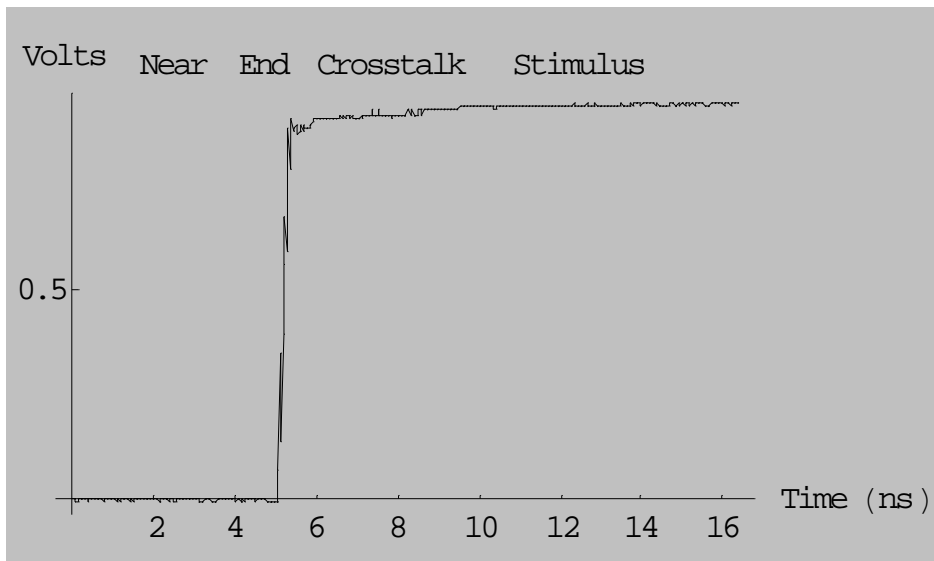

Cable EMI shield effectiveness

◆ Recommended procedure

- Test cables in 3 meter or equivalent screen room with full differential 1394 voltage applied as single-ended signal to cover maximum skews, terminate in 110 Ohms.

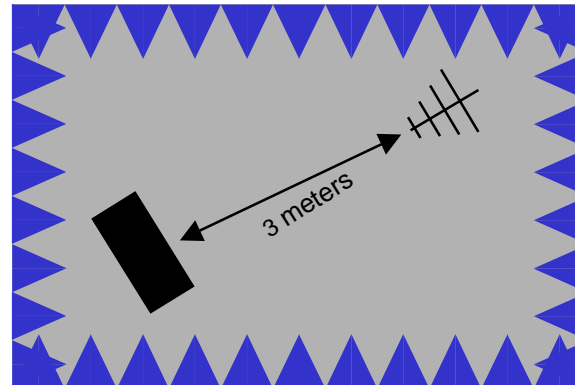

The following table shows the FCC Class B limits and CISPR-22 Class B Limits. The perenthised numbers show the same limit with the 6dB offset added to compensate for the three to ten meter difference.

FCC Class B Radiated Limits			CISPR-22 Class B limits		
Frequency (MHz)	Distance (meters)	Field Strength DBuV/m	Frequency (MHz)	Distance (meters)	Field Strength DBuV/m
30 - 88	3	40	30 - 230	10	30 (36)
88 - 216	3	43.52	230 - 1000	10	37 (43)
216 - 960	3	46.02	N/A	N/A	N/A
960 - 2000	3	53.92	N/A	N/A	N/A